

Electric central heating system

Quick and easy heating
with screed
heating program



The blowers can be supplied in any RAL colour requested


Standard RAL colour 7035

Equipped ready for operation with:

- Circulation pump
- Expansion vessel
- Heater
- Temperature and pressure display
- Safety valve STB
- Control cabinet
- Electronic control



230V - 3kW 400V - 9kW 400V - 18kW

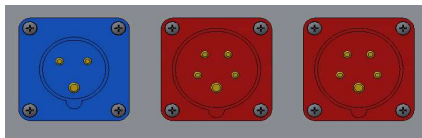

GUSTAV NOLTING GmbH

Orbker Straße 38 | D-32758 Detmold
Fon +49 (0) 52 31 . 60 01-0
Fax +49 (0) 52 31 . 60 01-51
info@gustav-nolting-gmbh.de
www.gustav-nolting-gmbh.de



Technical Data	
Type	EW-18e
Dimensions (W x D x H)	610 x 590 x 1.010 mm
Heat output	3 kW; 9kW; 18 kW; optional
Heating mode	20 – 80 °C
Screed heating program	25 / 50 / 25 °C
Control	digital, including screed heating program
Circulation pump	max. 2,5 m³/h, max. 5,5 m water column
Connection	Flow / Return flow ND 25 with coupling
Volume	MAG 8 Liters
Operating pressure	1,0 – 2,0 bar
Safety valve	3,0 bar
Frost protection system	yes
Kind of protection	IP 44
Electric supply	230 V/50Hz and 400 V/50Hz
Electric connection	CE plug 230 V; CEE 16 A; CEE 32 A
Weight: with/without water	approx. 70 / 84 kg
Packaging	on pallet