

Electric central heating system

Quick and easy heating

Hot Water Heater

with screed heating programs



The blowers can be supplied in any RAL colour requested


Standard RAL colour 7035

Equipped ready for operation with:

- Circulation pump
- Expansion vessel
- Temperature and pressure display
- Safety valve STB
- Digital control system
- Manuel heating
- with screed drying programs
- Functional heating and heating prior to floor laying according to DIN and VOB
- Water connections quick coupling DN 25
- 3 network connection options



230V - 3KW 400V - 9kW 400V - 18kW

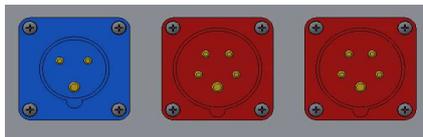

GUSTAV NOLTING GmbH

Orbker Straße 38 | D-32758 Detmold

Fon +49 (0) 52 31 . 60 01-0

Fax +49 (0) 52 31 . 60 01-51

info@gustav-nolting-gmbh.de

www.gustav-nolting-gmbh.de



Technical Data	
Type	EW-18e
Dimensions (W x D x H)	610 x 590 x 1,010 mm
Heat output, optional	3 kW; 9 kW; 18 kW
Flow temperature	20 ... 80 °C
Temperature control	automatically
Max. volume flow rate	2.5 m³/h
Max. funding level	5.5 m
Membrane expansion vessel	10 liters
Operating pressure	1.5 ... 2.0 bar
Pressure relief valve	3.0 bar
Water connection	VL/RL DN 25 quick coupling
Kind of protection	IP 44
Network connection 3 kW	CEE 16A; 230 V AC; PE; 50 Hz
Network connection 9 kW	CEE 16A; 400 V AC; N; PE; 50 Hz
Network connection 18 kW	CEE 32A; 400 V AC; N; PE; 50 Hz
Net weight	70 kilos
Packed	on pallet