

NG-A

Warm Air Heater

Stainless Steel

Heating medium natural gas and LPG

Heat output 100 kW

Air output 10,500 cbm/h

Fully automatic device



Application:

- Exhibition halls
- Construction site heating
- Site drying
- De-icing
- Event rooms
- Marquees
- Airplane hangars
- Horticulture
- Grain drying
- Greenhouses
- Rooms for commercial use
- Industrial halls
- Storage rooms
- Agriculture
- Centres of logistics
- Production facilities
- Protection spaces
- Sports halls
- Stable heating
- Tennis halls
- Air domes
- Event tents
- Consumer markets
- Workshops

Cost-effective and easy to maintain.


For heating poultry houses, effective and clean:

Fully automatic device with electrical ignition, supporting fan, ionisation flame monitoring and closed combustion chamber

Operation with LAS (air-flue-system), horizontal or vertical

Proven technology as standard:

- Warm air heaters the output of which is adapted to practical requirements
 - easy to adjust - operation with gas type G20, G25, G30, G31
- Housing / combustion chamber made of stainless steel
- Gas connection 3/4"
- Low-maintenance burner
- No exhaust gas emissions in stable = low CO² content
- Electrical connection with socket
- Splash-proof control box
- Proven, high-quality built-in components
- Automatic ignition
- Control possible via room thermostat or ventilation control
- Four-point suspension (tags are fixed)

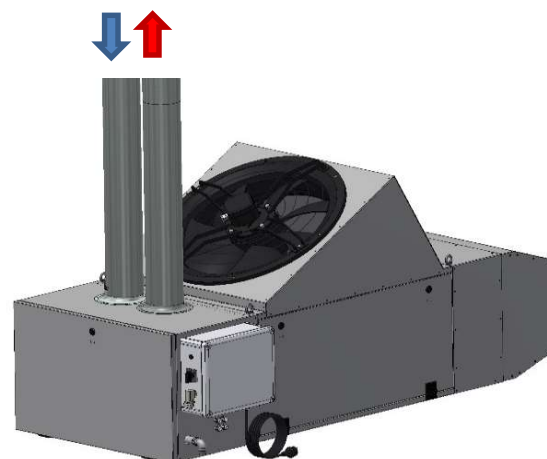

GUSTAV NOLTING GmbH

Orbker Straße 38 | D-32758 Detmold

Phone +49 (0) 52 31 . 60 01-0

Fax +49 (0) 52 31 . 60 01-51

info@gustav-nolting-gmbh.de

www.gustav-nolting-gmbh.de



NG-A 100

Technical Data		NG-A 100
Type		Natural gas and LPG / II 2 ELL 3 B/P
Type of gas / class	Natural gas and LPG	II 2 ELL 3 B/P
Nominal heat loading capacity	kW	100
Air output	m ³ /h	10,500
Connected pressure	mbar	20 bzw. 50
Connected load	kg/h	7.78
Electrical connection	V/Hz	230/50
Current consumption	A	5.3
Length of throw	m	50
Length	mm	1,890
Width	mm	900
Height	mm	920
Weight	kg	210
Product-ID-no.	CE-0085 CT0546	

Subject to changes of dimensions and technical data (Version: 2019-04)

